

Bathroom Occupancy Sensor

Featuring LoRaWAN®

VS330

Milesight



VS330 is a LoRaWAN® bathroom occupancy sensor providing a cost-effective solution for monitoring the occupancy status of the bathrooms and the cubicles of a public toilet in different scenarios. VS330 has combined dual technologies, Time-of-Flight (ToF) technology and Passive Infrared (PIR) sensor to identify the human body and motions with a smart logic and an industry-leading accuracy exceeding 99.5%. VS330 could easily adjust to different scenarios with 100% anonymity and low power consumption.

VS330 could be managed by integrated systems and it allows users to monitor the occupancy and trigger linkage to control other devices via a web browser or mobile App remotely. Damp-proof coating inside ensures it working well under various conditions.

VS330 can be widely used in workplace cubicles, restrooms and other places.

◆ Features

- High detecting accuracy based on Time-of-Flight (ToF) technology and Passive Infrared (PIR) detection with maximal possibility and industry-leading accuracy of over 99%
- 100% anonymity and GDPR-compliant to detect space occupancy and human detection
- Real-time update and ultra-low power consumption
- Effective in static or motional applications with low mistaken rate
- Effective in low-light or completely dark environments
- Damp-proof coating inside the device to ensure the device works well in various conditions of

bathrooms and other scenarios

- Adjustable sensor angle enables multi-mounting methods for various applications
- Built-in NFC for easy configuration
- Compatible with standard LoRaWAN® gateways and network servers
- Quick and easy management with Milesight IoT Cloud solution


◆ Specifications


| Wireless Transmission | |
|---------------------------------|-----------------------------------------------------------------|
| Protocol | LoRaWAN® |
| Antenna | Internal Antenna |
| Frequency | CN470/IN865/RU864/EU868/US915/AU915/KR920/AS923-1&2&3&4 |
| Tx Power | 16 dBm (868 MHz)/19 dBm (470 MHz)/22 dBm (915 MHz) |
| Sensitivity | -137dBm |
| Mode | OTAA/ABP Class A |
| Sensors | |
| ToF | |
| ToF FoV | 27° |
| Detection Range | 0.040 ~ 3.500m |
| Accuracy | ± 2cm |
| Resolution | 1mm |
| PIR | |
| Detection Area | 80° |
| Detection Distance | Maximum 2.5m |
| Others | |
| Sensor Adjustable Angle | 0°, 15°, 30°, 45°, 60°, 75° |
| Others | |
| LED | 1 × Status/Test Indicator |
| Button | 1 × Power/Reset Button |
| Software | |
| Power On/Off | Mobile App via NFC or Power Button |
| Configuration | Mobile App via NFC |
| Physical Characteristics | |
| Power Supply | 3 x 4000 mAh ER18505 Li-SOCl ₂ Replaceable Batteries |

| | |
|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|
| Battery Life* (90 users + within 7 consecutive hours per day) | Around 4.2 Years (SF7, EU868 & US915) Around 3.4 Years (SF10, EU868) Around 3.3 Years (SF10, US915) |
| Operating Temperature | -20°C ~ 60°C |
| Relative Humidity | 0% - 95% (non-condensing) |
| Ingress Protection | IP30 |
| Dimension | Φ 100 x 24 mm (Φ 3.94 x 0.95 in) |
| Housing & Color | PC+ABS (Flame Retardant), White |
| Weight | 150g (Batteries Included) |
| Installation | Ceiling Mount or Wall Mount via Screws or 3M tapes |
| Approvals | |
| Regulatory | CE, FCC, Telec |
| Environmental | RoHS |

* Tested under laboratory conditions and for guideline purposes only.

◆ Dimensions(mm)

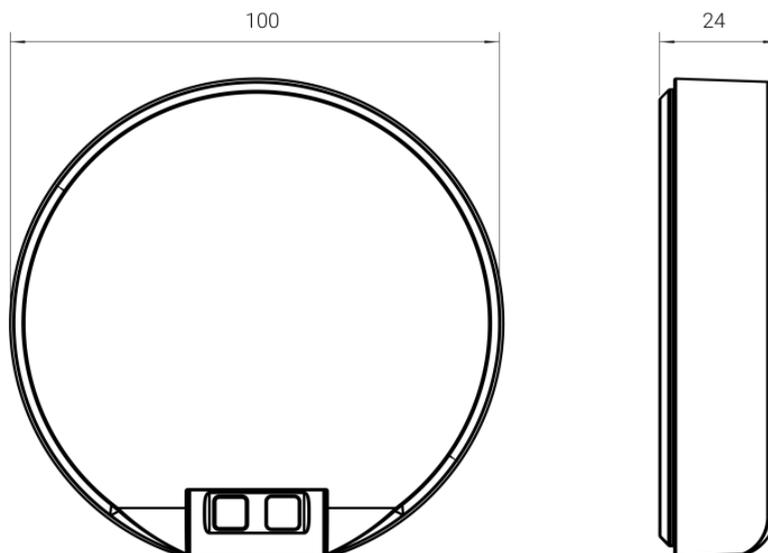

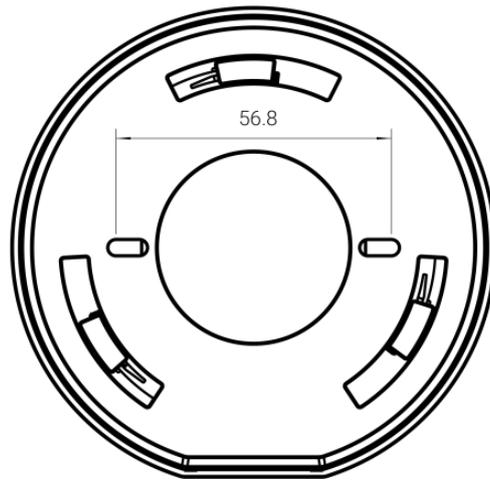

WELKO Av. Providencia 2330, Of. 63
+56 9 3174 3870 / +56 9 3427 0017
ventas@welko.cl - www.welko.cl

