

RK900-10 automatic weather instrument is simultaneously measure the atmospheric temperature, atmospheric humidity, air pressure, wind speed, wind direction, solar radiation, Illuminance, dust concentration and precipitation. Temperature, humidity and air pressure sensor is placed within the radiation shield, wind speed and direction of ultrasonic principle. 24G radar detection on rainfall, which can quickly detect rainfall and rainfall intensity. Internal GPS global positioning module and electronic compass give a good indication of latitude and longitude and relative speed, which can calculate the real and virtual wind speed and direction, and is especially suitable for installation on motion vector, such as special vehicles or vessels, etc. Different functional modules and measurement parameters can be combined according to user needs.

FEATURES

- ☐ High accuracy, fast response
- ☐ All in one measurement parameters
- ☐ Can identify rain, snow, and hail
- ☐ Can identify snowfall intensity (heavy, moderate, light)
- ☐ No moving parts, maintenance free
- ☐ Ultrasonic probe automatically heating
- ☐ Electronic compass, BDS /GPS optional
- ☐ Durable overall design, all-weather measurement



APPLICATIONS

- ☐ Unattended meteorological monitoring system
- ☐ Traffic meteorological
- ☐ Mobile meteorological monitoring system
- ☐ Electric power safety monitoring
- ☐ Solar or wind power generation
- ☐ Port and navigation of the ship
- ☐ Scenic region
- ☐ Meteorological science research

TECHNICAL SPECIFICATION

Measure item	Principle	Range	Resolution	Accuracy
Wind speed	Ultrasonic	0-60m/s	0.01m/s	±2%
Wind direction	Ultrasonic	0-360°	1°	<3°
Atmospheric temperature	MEMS	-40~+80°C	0.1°C	±0.5°C
Atmospheric humidity	MEMS	0-100%RH	0.1%RH	±3%RH
Atmospheric pressure	MEMS	300-1100hPa	0.1hpa	±1hPa
Precipitation	Radar	0-200m m/hr.	0.1mm	±5%(@ wind speed≤5m/s)
Solar radiation	Silicon-cell	0-2000W /m2	0.1W/m2	±5%(@ vertical irradiation)


RK900-10 Ultrasonic Automatic Weather Instrument


Illuminance	Silicon-cell	0-200000lux	0.1lux	±5% (@ vertical irradiation)
Dust concentration (PM2.5/PM10)	Photoelectric scattering	0-2000µg/m ³	1µg/m ³	±5%
Noise	MEMS	30-130dB	0.1dB	±3dB
Visibility	Forward scattering	20-10000m	1m	±15%
GPS①	Longitude, Latitude, Speed,Heading, Real wind speed			
Electronic Compass②	Real wind direction			
Inclination measurement	Horizontal X-axis direction, Horizontal Y-axis direction,Vertical Z-axis direction -90°-+90° (optional)			
Supply	12-24VDC			
Output	RS485,RS232,SDI-12			
Communication Protocol	Modbus-rtu(default),NMEA-0183,SDI-12			
Data update cycle	1s(default),other optional			
Power consumption	<3W,auto-heating power:6W			
Operating temperature	-40-+80°C			
EMC	EN61000-6-3, EN61000-3-3 EN61000-3-2, EN61000-6-1			
IP Rating	IP66			
Main material	ASA, Aluminum alloy base(optional)			

①,② Optional when installed on moving objects


DIMENSION

Unit :m m

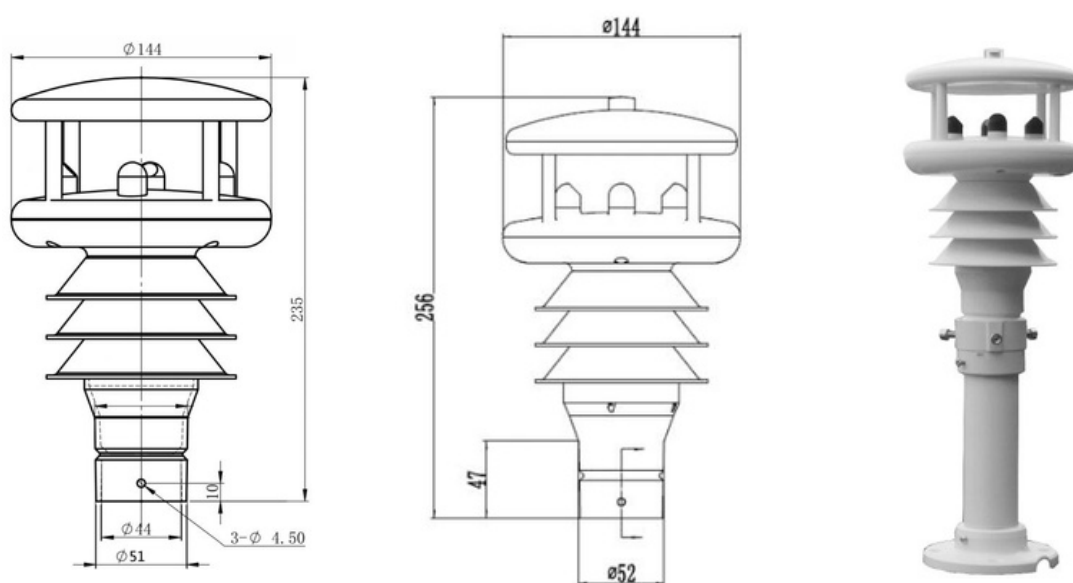

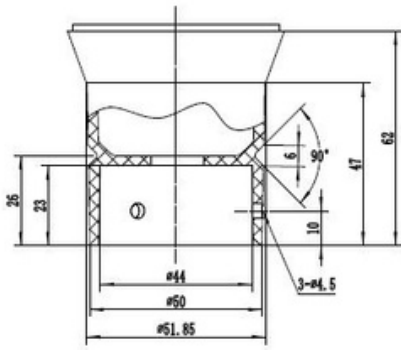

ASA base

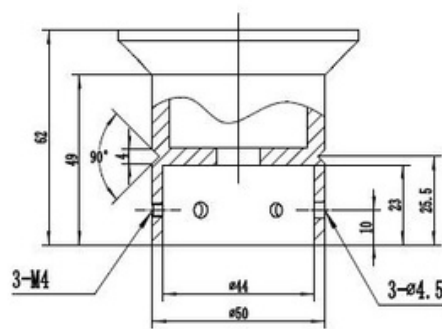

Aluminum alloy base

PARAMETER SELECTION TABLE

Remark	Series	Type	Supply	Output	Communication Protocol	Measure parameters	
RK							
	900						
		10					
			A				12-24VDC
			X				Other
				A			RS232
				B			RS485
				C			SDI-12
					A		Modbus-rtu(default)
					B		NMEA-0183
					C		SDI-12
					X		Other
						M5	Windspeed, winddirection temperature & humidity air pressure
						M6	Windspeed, winddirection temperature & humidity air pressure, precipitation
						M9	Windspeed, winddirection temperature & humidity air pressure, precipitation, solar, radiation, Illuminance, dust concentration
						X	Customized①

①Wind speed and direction are necessary, and other parameters can be combined freely, GPS/BDS and electronic compass are optional configurations. Please confirm with us before order.

Revision time	Reviser	Current Version	Remarks
20250407	Lee	V5.0	