

OK Ficha Técnica

BOMBA DOSIFICADORA SOLENOIDE DE MONTAJE MURAL — CERTIFICADA ATEX

Información General



La Serie OK es una bomba dosificadora de accionamiento solenoide apta para zonas certificadas ATEX, con caudal constante ajustable manualmente, dosificación temporizada mediante un timer semanal programable (hasta diez horarios de dosificación) y relé temporizado programable por contacto seco. Con cinco modelos en el rango, cubre caudales de 0,4 a 110 l/h y contrapresión de 0,1 a 20 bar, con alimentación 100÷240 Vac 50/60 Hz. El cabezal está disponible en SS316L o PVDF.




Aplicaciones

- Minería
- Canteras
- Oil & gas
- Tratamiento de aguas residuales
- Industria química
- Industria galvánica

OK Series curvas de rendimiento

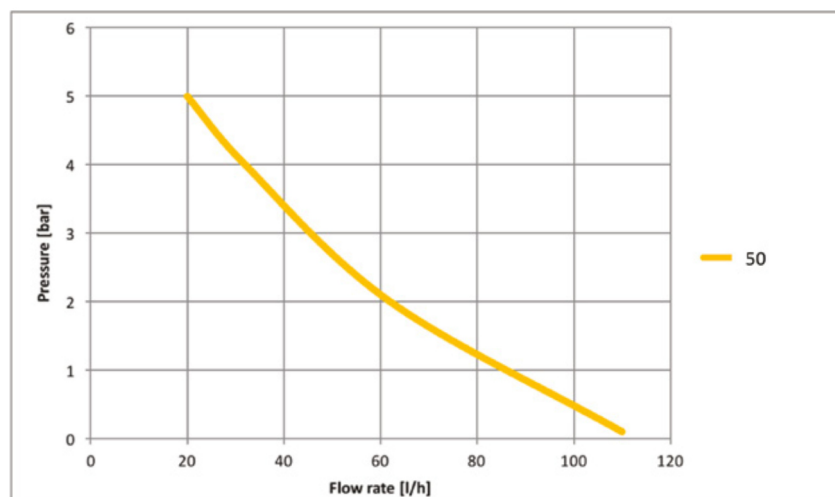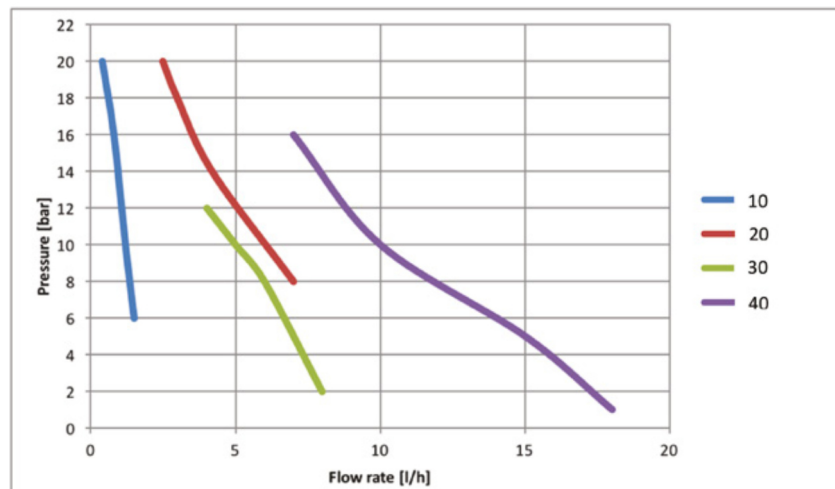

OK Series plano dimensional general

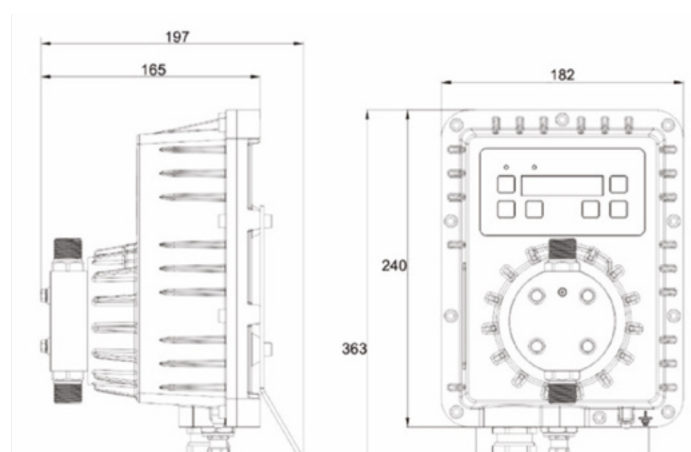

O Series key code

Model									
OG	Digital interface - Constant flow rate, manually adjustable. Proportional flow rate according to an external analogic (4-20 mA) or digital signal (water meter, 1:n or n:1). Timer function, ppm proportional dosing. Statistic. Password Input ON-OFF (remote control). Available with communication via Modbus protocol.								
OK	Digital interface - Constant flow rate, manually adjustable. Timed dosing with a weekly programmable timer, programmable timed relay by activating a dry contact								
		Hydraulics	Pressure [bar]	Flow rate [l/h]	Capacity [cc/stroke]	Frequency [stroke/1']	Ø Hydr Connections IN / EXT.[mm]		
		10	20	0.4	0,06	120	4 / 7 discharge 4 / 6 suction		
			16	0.8	0,11				
			10	1.2	0,17				
			6	1.5	0,21				
		20	20	2.5	0,35	120	4 / 7 discharge 4 / 6 suction		
			18	3	0,42				
			14	4.2	0,58				
			8	7	0,97				
		30	12	4	0,42	160	4 / 6		
			10	5	0,52				
			8	6	0,63				
			2	8	0,83				
		40	16	7	0,38	300	4 / 6		
			10	10	0,55				
			5	15	0,83				
			1	18	1,00				
		50	5	20	1,11	300	8 / 12		
			4	32	1,78				
			2	62	3,44				
			0.1	110	6,11				
		Power supply							
		N	100÷240 Vac 50/60 Hz						
		Liquid end		Body					
		H		PVDF					
		I		SS316L					
		Installation kit		Body					
		H		PVDF					
		X		with 1.5 bar injection valve				not for hydraulic 50	
		0		without kit				only with Liquid End "I"	
		Seals							
		0		FKM-B					
		1		EPDM					
		2		PTFE				Standard with Liquid End "I"	
		3		FFKM				Installation kit with PTFE seals (not for Hydraulic 50)	
		Market							
		0							
		Customisation							
		X		ATEX					
		Optional							
		0							
OG	20	N	H	H	0	0	X	0	