



RANGE DIGISENS

## TRIPOD

NUMERICAL MULTIPARAMETER PROBE  
NUMERICAL TECHNOLOGY FOR  
ENHANCED RELIABILITY MEASURES

### APPLICATIONS

Urban wastewater treatment  
(inlet control)  
Treatment of industrial effluents  
Surface water monitoring  
Fish farming, aquaculture  
Drinking water

### ADVANTAGES



- Measure until 8 parameters with the same probe
- Technology of oxygen measure by optical way
- Numerical communication Modbus RS-485 and SDI12
- Compact, strong and tight probe

### MEASURED PARAMETERS

Temperature | pH, ORP | Conductivity, salinity, TDS | Oxygen (% Sat, ppm, mg/L)  
| Turbidity (NTU, FNU), SS (mg/L)

### MULTIPARAMETER PROBE

The new numerical TRIPOD of PONSEL MESURE allows to measure until 8 physico-chemical parameters in the same time dedicated to the quality of waters among the following ones: pH, ORP, Temperature, DO (by optical way), turbidity ( NTU / FNU), Turbidity ( mg / L ), conductivity, salinity, TDS..

The probe is equipped with a snap ring and a carabiner to secure your installations.

## READY TO BE CONNECTED

Compact, robust and communicating in Modbus R485 or SDI12 the TRIPOD can be associated with every type of terminal with inlet RS485 Modbus (automaton of remote processing, transmitter, to logger) or SDI12 (acquisition device, logger with transmission GSM / GPRS, sampler ISCO, flowmeter).

Resisting the disturbances: a pre-amplification is integrated into the sensor and the digital processing of the signals allows an extreme fiabilisation of the measures.

**The TRIPOD associated with the handheld multiparameters ODEON allows an optimization and a fiabilisation of your physico-chemical measures : important capacity of recording (until 100 000) and large autonomy**


## SENSORS TECHNICAL CHARACTERISTICS

3 sensors to choose from

	Parameter	Range	Accuracy	Sensor type
PH/REDOX/T°C	Temperature	0,00 to + 50,00 °C	± 0,5°C	NTC Inox
	pH	0,00 to 14,00 pH	± 0,1	Plasticized PONSEL "PLASTOGEL"® : electrolyte Ag/AgCl reference
	ORP	- 1000,0 to + 1000,0 mV	± 2 mV	Platinum electrode Ag/AgCl reference
OPTOD*	Dissolved Oxygen / T°C	0,00 to 20,00 mg/L 0,0 to 200,0 % SAT	± 0,1 mg/L ± 1 %	PONSEL OPTOD optical luminescence technology ASTM D888 – Compliance
C4E	Conductivity	0,0 to 200,0 0 to 2 000 µS/cm 0,00 to 20,00 0,0 to 200,0 mS/cm	± 1 % of the full range	C4E Technology 4 electrodes (2 platinum and 2 graphite)
	Salinity	5,00-60,00 g/Kgt	± 0,5 % of the full range	C4E Technology 4 electrodes (2 platinum and 2 graphite)
NTU	Turbidity	0,00 to 50,0 0,0 to 200,0 NTU 0 to 1000 NTU 0 to 4000 NTU AUTOMATIC RANGE Range 0-4500 mg/L	± 1 % of the full range	IR 90° technology ISO 7027 compliance

Probe	
Sensors	3 sensors
Interface signal	Modbus RS485 /SDI12
Measurement frequency	1 s max
Power supply	5-12 Volts
Dimensions	Diameter max. 75 mm, Lenght (without hook) 288 mm, Lenght with hook 394 mm
Weight	1300 g
Material	EPDM, PVC, Inox
Pressure	5 bars
Connection	9 armoured connectors, polyurethane jacket, bare-wires or waterproof Fisher connector
Protection	IP68

## WIRING DIAGRAM

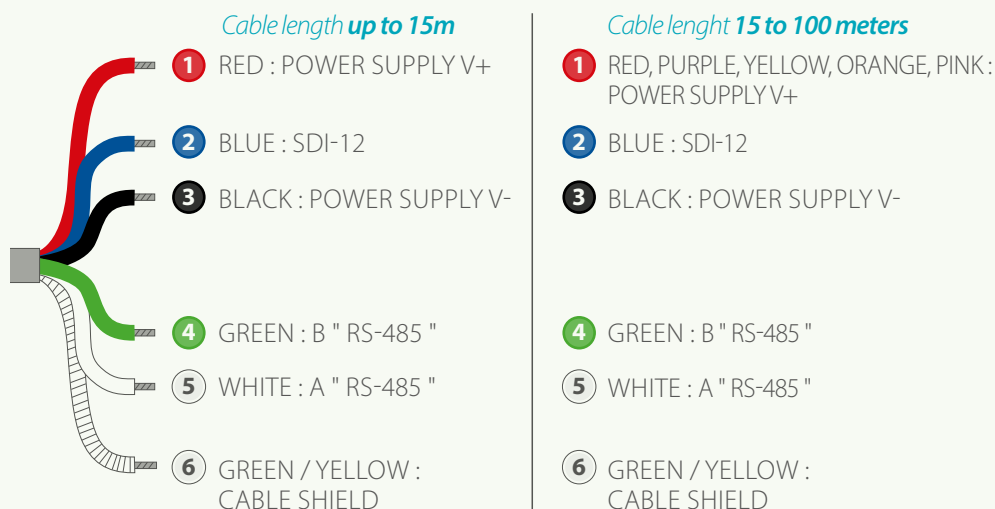

**CONNECT WIRES 3 AND 6 TOGETHER**

## NEW MEASURING CELL, THE ESSENTIAL ACCESSORY FOR YOUR DYNAMIC MEASUREMENTS

With the new measuring pot for TRIPOD, you can now carry out your water quality monitoring at great depths more easily. Simply bring your sample as close to the surface as possible, using a pump, feeding the measuring cell via inlet/outlet pipes.

### Technical characteristics Reference PF-ACC-C-00590

<b>Dimensions</b>	L : 230mm ; w : 110mm ; h : 190mm (passage chamber alone without TRIPOD)
<b>Material</b>	TRIPOD: U-PVC, POM C, NBR Fluid connectors: POM, Stainless steel 301, EPDM Sealing ring: Nylon PA12, NBR
<b>Hose connection</b>	Quick connection in and out for rigid or flexible hose
<b>Allowable pressure</b>	+1.5 bars
<b>Flow Ranges</b>	0.1 l/min to 2.5 l/min
<b>Range Temperature</b>	+1°C to +50°C

